



充电式冲击起子机
TD090D

满足专业人士需要



极高的工作效率





最大转矩 90N.m (800in.lbs)



效率对比

注意: 1.测试结果与材料等的硬度有极大关系。
2.下表中的数字是假定同类产品“B”的能力为100时的相对值。

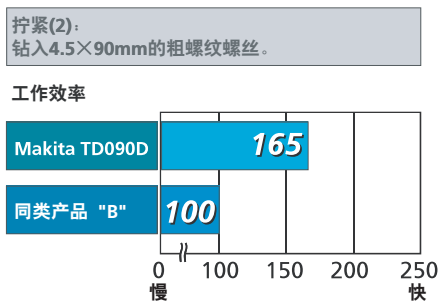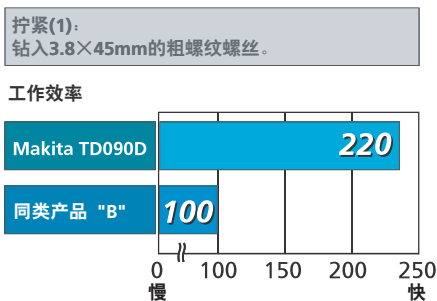

充电式冲击起子机

- 无段变速
- 正逆转
- 电子自动刹车
- 内置工作灯
- 携带箱



TD090D

能力	
机螺丝:	M4 - M8mm (5/32" - 5/16")
标准螺栓:	M5 - M12 (3/16" - 1/2")
高强度螺栓:	M5 - M10 (3/16" - 3/8")
粗螺纹(长度):	22 - 90mm (7/8" - 3-1/2")
冲击数(ipm)	0-3,000
回转数(rpm)	0-2,400
最大扭矩	90N.m (800in.lbs)
尺寸(L x W x H)	155 x 54 x 178mm(6-1/8" x 2-1/8" x 7")
净重	0.92kg (2.0lbs)
电压	10.8V

标准附件
充电器、工具箱、皮套、十字改锥头

不同国家或地区的标准附件和规格可能不同。

Makita Corporation

<http://www.makita.com.cn>